


6.3x32mm 1 $\frac{1}{4}$ "x 1 $\frac{1}{4}$ " Glass Fuses

Features

- Quick blow (F)
- Glass cartridge, nickel plated end caps
- Break capacity, 35A/250V (to 1A), 100A/250V (to 3.5A), 200A/250V (above 3.5A)
- To IEC 127
- Axially centred element

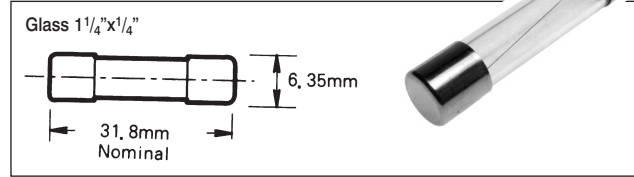

Features

- Time delay (T)
- Glass cartridge, nickel plated end caps
- Break capacity, 35A/250V (to 1A), 100A/250V (to 3.5A), 200A/250V (above 3.5A)
- To IEC 127
- Axially centred element



| Type No. | Rating | Type No. | Rating |
|---------------|--------|---------------|--------|
| CF06332F/100 | 100mA | CF06332F/2.5 | 2.5A |
| CF06332F/125 | 125mA | CF06332F/3 | 3A |
| CF06332F/160 | 160mA | CF06332F/3.15 | 3.15A |
| CF06332F/200 | 200mA | CF06332F/4 | 4A |
| CF06332F/250 | 250mA | CF06332F/5 | 5A |
| CF06332F/500 | 500mA | CF06332F/6.3 | 6.3A |
| CF06332F/750 | 750mA | CF06332F/7 | 7A |
| CF06332F/1 | 1A | CF06332F/7.5 | 7.5A |
| CF06332F/1.25 | 1.25A | CF06332F/8 | 8A |
| CF06332F/1.5 | 1.5A | CF06332F/10 | 10A |
| CF06332F/2 | 2A | CF06332F/15 | 15A |

| Type No. | Rating | Type No. | Rating |
|---------------|--------|---------------|--------|
| CF06332T/100 | 100mA | CF06332T/2.5 | 2.5A |
| CF06332T/125 | 125mA | CF06332T/3 | 3A |
| CF06332T/160 | 160mA | CF06332T/3.15 | 3.15A |
| CF06332T/200 | 200mA | CF06332T/4 | 4A |
| CF06332T/250 | 250mA | CF06332T/5 | 5A |
| CF06332T/500 | 500mA | CF06332T/6.3 | 6.3A |
| CF06332T/750 | 750mA | CF06332T/7 | 7A |
| CF06332T/1 | 1A | CF06332T/7.5 | 7.5A |
| CF06332T/1.25 | 1.25A | CF06332T/8 | 8A |
| CF06332T/1.5 | 1.5A | CF06332T/10 | 10A |
| CF06332T/2 | 2A | CF06332T/15 | 15A |



FM28614
BS EN ISO
9001:
2000

Tel: +44 (0)1727 864437 Fax: +44 (0)1727 855400
E-mail: camdeninfo@camdenelec.com Website: www.camdenelec.com



Because we operate a constant improvement policy, our products are subject to change without notice.

CAMDEN
E L E C T R O N I C S L T D

6.3x32mm 1 1/4" x 1/4" Ceramic Fuses

Features

- Quick blow (F)
- Ceramic cartridge, nickel plated end caps
- Break capacity 1000A
- To IEC 127
- Sand filled

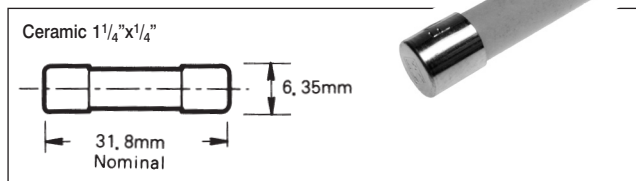

Features

- Time delay (T)
- Ceramic cartridge, nickel plated end caps
- Break capacity 1000A
- To IEC 127
- Sand filled



| Type No. | Rating | Type No. | Rating |
|----------------|--------|----------------|--------|
| CF06333CF/100 | 100mA | CF06333CF/3.15 | 3.15A |
| CF06333CF/250 | 250mA | CF06333CF/4 | 4A |
| CF06333CF/500 | 500mA | CF06333CF/5 | 5A |
| CF06333CF/750 | 750mA | CF06333CF/6.3 | 6.3A |
| CF06333CF/1 | 1A | CF06333CF/7.5 | 7.5A |
| CF06333CF/1.25 | 1.25A | CF06333CF/8 | 8A |
| CF06333CF/1.5 | 1.5A | CF06333CF/10 | 10A |
| CF06333CF/2 | 2A | CF06333CF/15 | 15A |
| CF06333CF/2.5 | 2.5A | CF06333CF/20 | 20A |
| | | CF06333CF/25 | 25A |

| Type No. | Rating | Type No. | Rating |
|----------------|--------|----------------|--------|
| CF06333CT/100 | 100mA | CF06333CT/2.5 | 2.5A |
| CF06333CT/125 | 125mA | CF06333CT/3.15 | 3.15A |
| CF06333CT/160 | 160mA | CF06333CT/4 | 4A |
| CF06333CT/200 | 200mA | CF06333CT/5 | 5A |
| CF06333CT/250 | 250mA | CF06333CT/6.3 | 6.3A |
| CF06333CT/315 | 315mA | CF06333CT/7 | 7A |
| CF06333CT/400 | 400mA | CF06333CT/7.5 | 7.5A |
| CF06333CT/500 | 500mA | CF06333CT/8 | 8A |
| CF06333CT/750 | 750mA | CF06333CT/10 | 10A |
| CF06333CT/1 | 1A | CF06333CT/12 | 12A |
| CF06333CT/1.25 | 1.25A | CF06333CT/12.5 | 12.5A |
| CF06333CT/1.5 | 1.5A | CF06333CT/15 | 15A |
| CF06333CT/2 | 2A | CF06333CT/20 | 20A |
| | | CF06333CT/25 | 25A |