

PCB
TERMINAL
BLOCKS

INTER-
CONNECTION

FUSES &
FUSE-
HOLDERS

BATTERIES

LED'S

MINIATURE
SWITCHES

INTERFACE
MODULES &
SUPPORTS

ENCLOSURES

IC & PLCC
SOCKETS


RELAY
BASES

CONTROL
PRODUCTS


2.4x7mm Micro Miniature Axial Fuses

Features

- Very fast acting

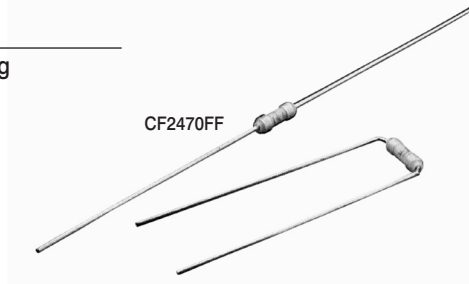

CF2470FF series

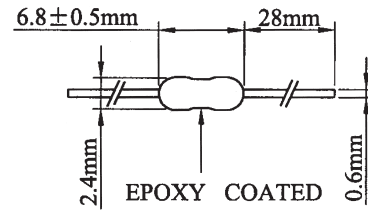

Specification


Material:	Epoxy coated body
Approvals:	UL, CSA,
Int current:	30Amp@250Vac
Operating temperature:	-55 °C to 125 °C
Soldering temperature:	260 °C for 10 sec max
Solder leads:	Tin plated copper
Electrical characteristics:	100% 4 hours min blowing time 200% 5 sec max blowing time

Code	Rating	Code	Rating
CF2470FF/100	100mA	CF2470FF/1.2	1.2A
CF2470FF/125	125mA	CF2470FF/1.25	1.25A
CF2470FF/160	160mA	CF2470FF/1.5	1.5A
CF2470FF/200	200mA	CF2470FF/1.6	1.6A
CF2470FF/250	250mA	CF2470FF/2.25	2.25A
CF2470FF/300	300mA	CF2470FF/2.5	2.5A
CF2470FF/315	315mA	CF2470FF/3	3A
CF2470FF/350	350mA	CF2470FF/3.15	3.15A
CF2470FF/375	375mA	CF2470FF/3.5	3.5A
CF2470FF/400	400mA	CF2470FF/4	4A
CF2470FF/500	500mA	CF2470FF/5	5A
CF2470FF/600	600mA	CF2470FF/6	6A
CF2470FF/630	630mA	CF2470FF/6.3	6.3A
CF2470FF/700	700mA	CF2470FF/7	7A
CF2470FF/750	750mA	CF2470FF/8	8A
CF2470FF/800	800mA	CF2470FF/9	9A
CF2470FF/1	1A	CF2470FF/10	10A


2.4x7mm Micro Miniature Axial Fuses

Features

- Slow blow

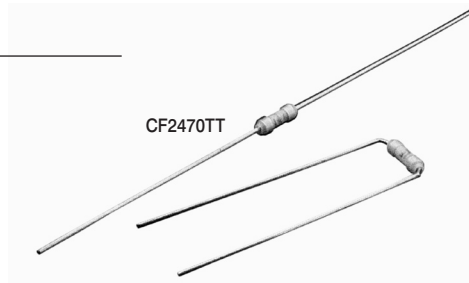

CF2470TT series

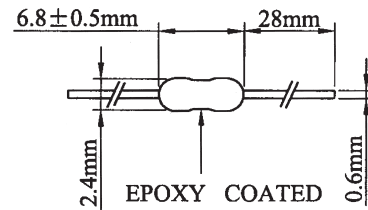

Specification

Material:	Epoxy coated body
Approvals:	UL, CSA,
Int current:	30Amp@250Vac
Operating temperature:	-55 °C to 125 °C
Soldering temperature:	260 °C for 10 sec max
Solder leads:	Tin plated copper
Electrical characteristics:	100% 4 hours min blowing time 200% 1 sec min, 60 sec max 300% 0.2 sec min, 3 sec max 800% 0.02 sec min, 0.1 sec max

Code	Rating	Code	Rating
CF2470TT/100	100mA	CF2470TT/1.2	1.2A
CF2470TT/125	125mA	CF2470TT/1.25	1.25A
CF2470TT/160	160mA	CF2470TT/1.5	1.5A
CF2470TT/200	200mA	CF2470TT/1.6	1.6A
CF2470TT/250	250mA	CF2470TT/2	2
CF2470TT/300	300mA	CF2470TT/2.5	2.5A
CF2470TT/315	315mA	CF2470TT/3	3A
CF2470TT/350	350mA	CF2470TT/3.15	3.15A
CF2470TT/375	375mA	CF2470TT/3.5	3.5A
CF2470TT/400	400mA	CF2470TT/4	4A
CF2470TT/500	500mA	CF2470TT/5	5A
CF2470TT/600	600mA	CF2470TT/6	6A
CF2470TT/630	630mA	CF2470TT/6.3	6.3A
CF2470TT/750	750mA	CF2470TT/7	7A
CF2470TT/800	800mA	CF2470TT/8	8A
CF2470TT/1	1A	CF2470TT/9	9A
		CF2470TT/10	10A



FM28614
BS EN ISO
9001:
2000

Tel: +44 (0)1727 864437 Fax: +44 (0)1727 855400
E-mail: camdeninfo@camdenelec.com Website: www.camdenelec.com

Because we operate a constant improvement policy, our products are subject to change without notice.

