




# 5x20mm PCB Fuse Carrier

## Features

- PCB mounting
- Kinked pin for pcb retention CFH02W
- Transparent insulation cover CFH02H
- UL 94 V0 cover available on request – CFH02H V0
- Industry standard
- According to IEC 127-6
- 22.6mm pitch

## Specification

Rating:	10A / 250V
Contacts/Resistance:	Tinned nickel plated Brass/<5mΩ
Dielectric strength	>3kV/60sec
Moulding:	UL94-V1 self extinguishing PPOM
Insulation Resistance:	>100MΩ
Temperature:	-20°C to 125°C
Power dissipation:	1.6W
Recommended PCB hole size:	1.3mm
Approvals:	CE, SEMKO, UL, CUL, VDE

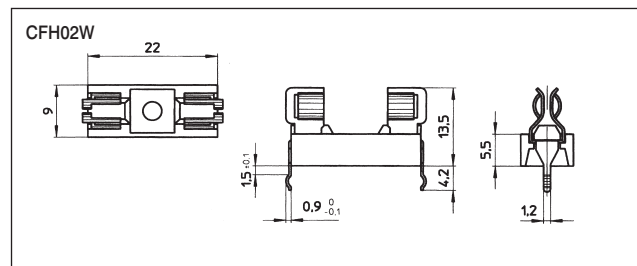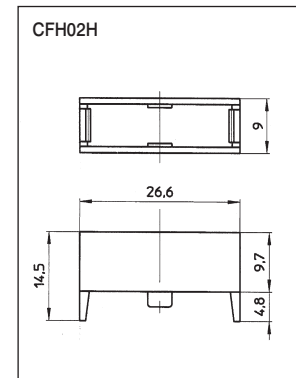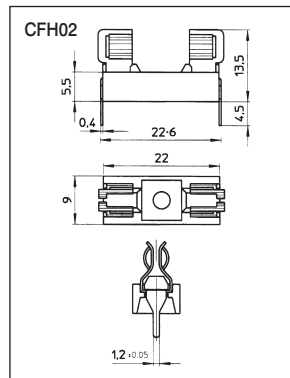

Type No.	Fuse Size
CFH02	5x20mm
CFH02W	5x20mm
CFH02H	5x20mm



Tel: +44 (0)1727 864437 Fax: +44 (0)1727 855400  
 E-mail: [camdeninfo@camdenelec.com](mailto:camdeninfo@camdenelec.com) Website: [www.camdenelec.com](http://www.camdenelec.com)

Because we operate a constant improvement policy, our products are subject to change without notice.



FM28614  
 BS EN ISO  
 9001:  
 2000

LED'S  
 MINIATURE SWITCHES  
 INTERFACE MODULES & SUPPORTS  
 ENCLOSURES  
 IC & PLCC SOCKETS  
 RELAY BASES  
 CONTROL PRODUCTS

PCB  
TERMINAL  
BLOCKS

INTER-  
CONNECTION

FUSES &  
FUSE-  
HOLDERS

BATTERIES

LED'S

MINIATURE  
SWITCHES

INTERFACE  
MODULES &  
SUPPORTS

ENCLOSURES

IC & PLCC  
SOCKETS


RELAY  
BASES

CONTROL  
PRODUCTS

5x20mm Semi-enclosed PCB Mounting Fuseholders

Features

- PC board mounting
- Fuse retaining insulation cover  
CFH14HB for CFH14
- Enclosed contacts
- 22.6mm pitch
- Black Colour
- IEC 127-6

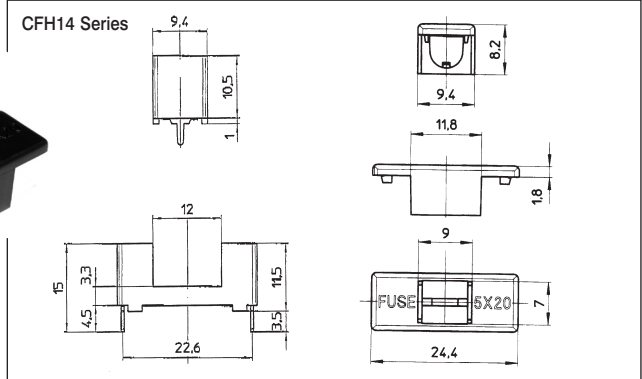

Specification


Rating:	6.3A/250V
Contacts/Resistance:	Tinned nickel plated Brass/<5mΩ
Dielectric strength	>3kV/60sec
Material:	UL94-V0 flame retardant PA68
Insulation Resistance:	100MΩ
Power dissipation:	1.6W
Recommended PCB hole size:	1.5mm
Approvals:	CE, SEMKO, UL, CUL, VDE

Type No.	Fuse Size
CFH14	5x20mm
CFH14HB	5x20mm

5x20mm Semi-enclosed PCB Mounting Fuseholders


Features

- PC board mounting
- Fuse retaining insulation cover
- Enclosed contacts
- IEC 127-6
- Green Colour


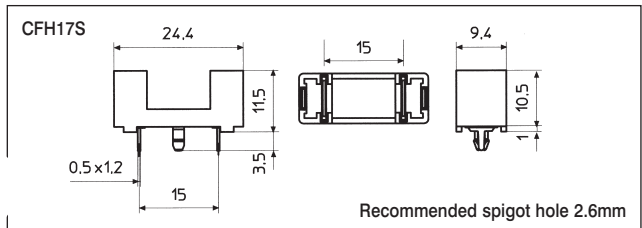


Specification

Rating:	6.3A/250V
Contacts/Resistance:	Tinned nickel plated Brass/<5mΩ
Dielectric strength	>3kV/60sec
Material:	UL94-V0 flame retardant PA68
Insulation Resistance:	100MΩ
Power dissipation:	1.6W
Recommended PCB hole size:	1.5mm
Approvals:	CE, SEMKO, UL, CUL, VDE

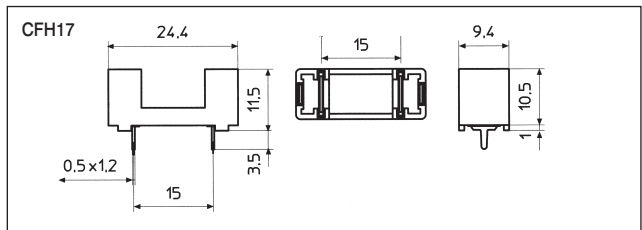

Type No.	Fuse Size
CFH17S	5x20mm
CFH17	5x20mm
CFH14S	5x20mm
CFH14HG	5x20mm

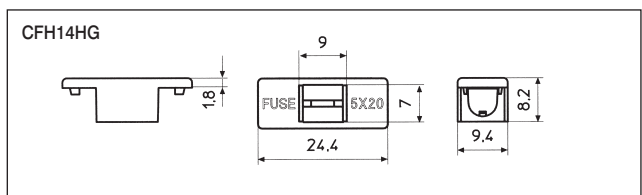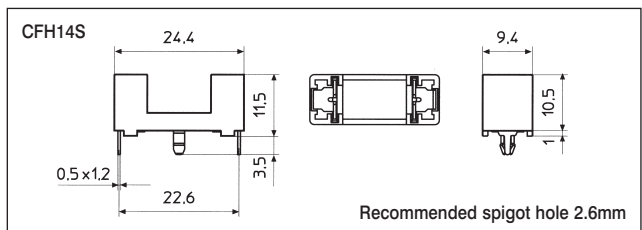

FM28614  
BS EN ISO  
9001:  
2000


Tel: +44 (0)1727 864437 Fax: +44 (0)1727 855400  
E-mail: camdeninfo@camdenelec.com Website: www.camdenelec.com



Because we operate a constant improvement policy, our products are subject to change without notice.



## 5x20mm Horizontal & Vertical PCB Mounting Fuseholder Compact

- Features**
- Finger/screwdriver release bayonet carrier
  - Horizontal or vertical mounting
  - Precision footprint
  - 10mm pitch
  - Anti solder wicking
  - IEC 127-6
  - Industry standard

Rating:	6.3A/250V
Contacts/Resistance:	Tinned Nickel plated Brass/<5mΩ
Dielectric strength	>3kV/60sec
Insulation Resistance:	>100MΩ
Mouldings:	UL94-V0 flame retardant PBT
Power dissipation:	2.5W
Recommended PCB hole size:	1.3mm
Approvals:	VDE, SEMKO,  , CSA & CE

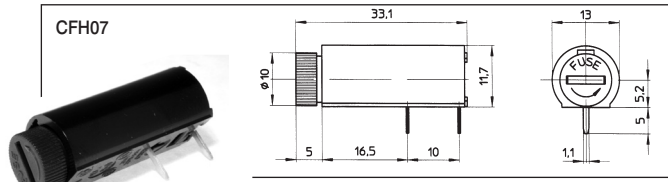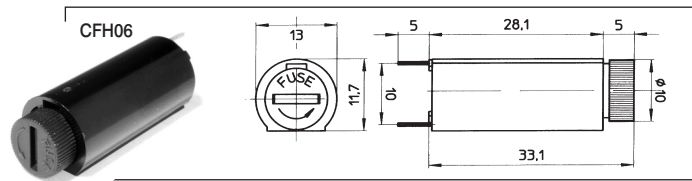


Type No.	Fuse Size
CFH06	5x20mm
CFH07	5x20mm

## PCB Fuseholder for Plug-in Fuses

- Features**
- Precision turned pins
  - Twist free construction
  - Low profile
  - High retention design prevents fuse walkout during heavy vibrations
  - Side and end stackable
  - Anti wicking pin design
  - UL94-V0 mouldings
  - High solderability pin design
  - 200 operations minimum life



Type No.	Poles
CSICS/3/101	2

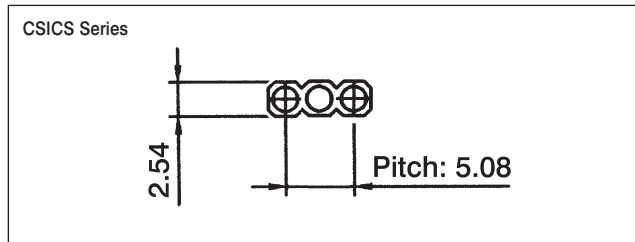

**Specification**

Housing	Glass filled polyester UL94-V0
Insulation resistance	10 <sup>3</sup> MΩ at V=100V
Temperature range	-55°C to 125°C
Contact	Beryllium copper, heat treated
Plating	2μm/80μ" nickel 5μm/200μ" tin
Current rating	3A
Contact resistance	<4mΩ
Insertion force	<250g
Withdrawal force	>50g