

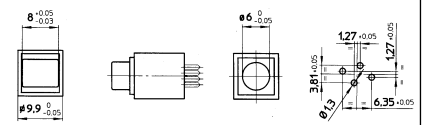


**PCB Push Switches****Features**

- Robust 9mm Noryl casing
- Reliable tactile action
- Flow solder wash away cleaning
- PC terminal standard
- Rectangular or round actuator
- Snap on caps in 9 colours for rectangular actuator

**Type No.**

CKS05S4	Rectangular Switch
CKS05R4	Round Switch
CKS9B	Black Button
CKS9R	Red Button
CKS9BLU	Blue Button
CKS9G	Green Button
CKS9O	Orange Button
CKS9Y	Yellow Button
CKS9LG	Light Grey Button
CKS9DG	Dark Grey Button
CKS9W	White Button

**CKS05S4****CKS05R4****Specification**

Rating load:	20mA/35V DC
Contact resistance:	25mΩ
Insulation resistance:	>25MΩ
Life:	≥ 250 000 operations
Operating force:	1.2N
Return force:	0.8N
Temperature range:	-20°C to +70°C
Contact material:	Silver plated nickel
Bounce time:	<2msec

**Miniature Slide Switch****Features**

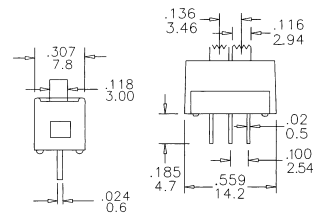

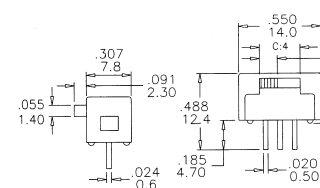

- One or two pole options
- High reliability
- Top or side actuator

**Specification**

Rating:	2amps with resistive load at 250 VAC
Mechanical life:	20 000 operations
Electric life:	3000 actuations at full load
Insulation resistance:	1000MΩ/500V
Contact resistance:	<10mΩ
Dielectric strength:	1kV
Operating temperature:	-40° – +85°C

**Materials**

Slide handle:	Nylon
Contacts:	Coin silver, silver plated
Gold plated contacts available	

**CT Series top actuator****Double pole****CT Series side actuator****Double pole**

Type No.	Pole	Actuator
CT1106S1A20	Single	Top
CT2106S1A20	Double	Top
CT1106S2A20	Single	Side
CT2106S2A20	Double	Side