



## 1 & 2 Pole, DIN Rail Mounting Relay Base

### Features


- Compact 1 and 2 pole versions
- Din rail mounted EN50022 or chassis mount
- Rising clamp with captive screws
- 2 x 2.5mm<sup>2</sup> wire acceptance (14AWG)
- Unique relay release lever, three sizes to suit popular relays
- Marking tag supplied
- Status indication/protection modules options
- G rail adaptor available



CRBS25-32-35-50

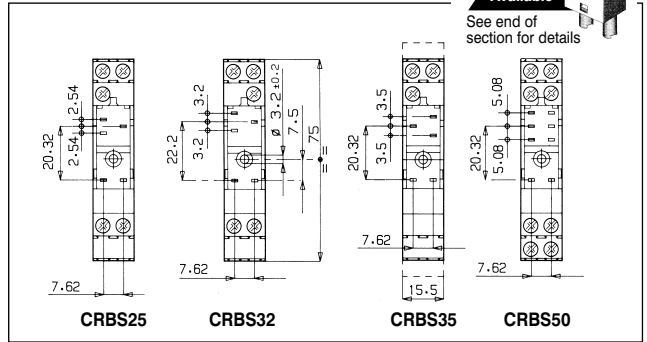

Type No	Relay Pitch	Clip
CRBS25	2.5mm	CRCMS12
CRBS32	3.2mm	CRCMS16
CRBS35	3.5mm	CRCMS25
CRBS50	5.0mm	



### Specification

Rating:	12A/300VAC
Dielectric strength:	>3kV
Temperature, working:	85°C
Moulding:	UL94-V1 Self extinguishing glass filled PA6
Contacts:	6μ nickel plated brass
Screws:	Nickel plated steel M3 combination head
Approvals:	CSA and UL

PCB  
TERMINAL  
BLOCKS

FUSES &  
FUSE-  
HOLDERS

BATTERIES

LED'S

MINIATURE  
SWITCHES

INTERFACE  
MODULES &  
SUPPORTS

ENCLOSURES

IC & PLCC  
SOCKETS

RELAY  
BASES

CONTROL  
PRODUCTS



FM28614  
BS EN ISO 9002:  
1994

Tel: +44 (0)1727 864437 Fax: +44 (0)1727 855400  
E-mail: [info@camden-electronics.co.uk](mailto:info@camden-electronics.co.uk) Website: [www.camden-electronics.co.uk](http://www.camden-electronics.co.uk)

Because we operate a constant improvement policy, our products are subject to change without notice.

