


DIN Rail Mount Logical Wiring Relay Bases

Features

- Compact 1 or 2 pole
- 'Safety' Isolation between coil & Contacts
- Din rail mounted EN50022 or chassis mount
- Rising clamp with captive screws
- 2 x 2.5mm wire acceptance (14AWG)
- Unique relay release lever, three sizes to suit popular relays
- Marking tag
- Status indication/ protection modules options
- G rail adaptor available







CRBS50/3

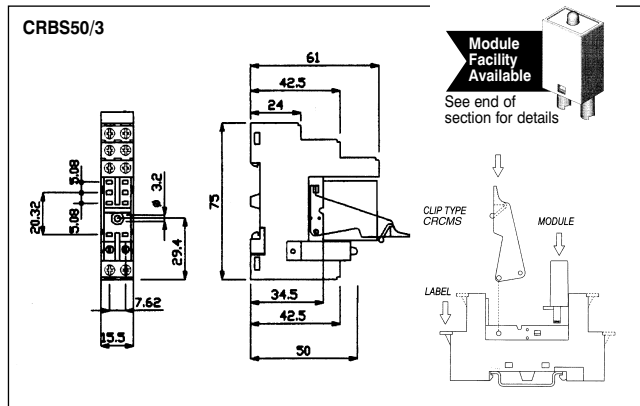

Specification

Rating:	12A/300VAC
Dielectric strength:	>3kV
Temperature, working:	85°C
Moulding:	UL94-V1 Self extinguishing glass filled PA6
Contacts:	6μ nickel plated brass
Screws:	Nickel plated steel M3 combination head
Approvals:	CSA and UL

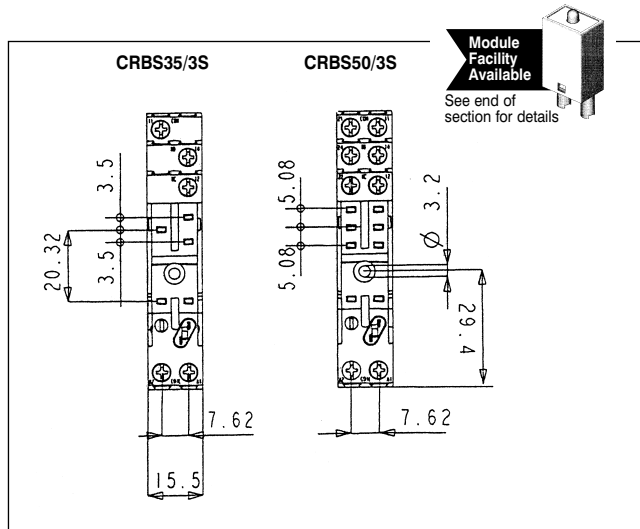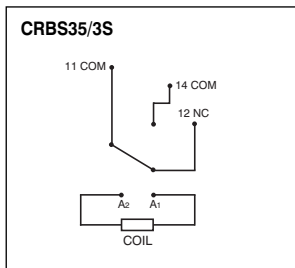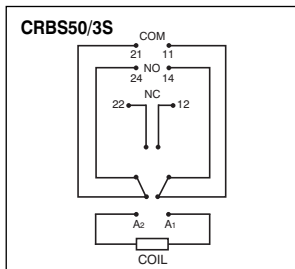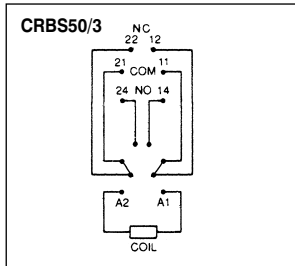

Type No
CRBS50/3
CRBS50/3S
CRBS35/3S
Clip
CRCMS12
CRCMS16
CRCMS25

