


# PCB TERMINAL BLOCKS

## 2.5mm Pitch Screwless Terminal Block

- Interlocking modules
- 45° degree cable entry
- Lever actuator cable release
- Moulded in UL94-V0 flame retardant PA66
- 0.2-0.5mm<sup>2</sup>(28-20AWG) solid cable
-  Approved



CSTBA45VC



TYPE NO.	LENGTH
CSTBA45VC/2	6.5mm
CSTBA45VC/3	9.0mm
CSTBA45VC/4	11.5mm
CSTBA45VC/5	14.0mm
CSTBA45VC/6	16.5mm
CSTBA45VC/7	19.0mm
CSTBA45VC/8	21.5mm
CSTBA45VC/9	24.0mm
CSTBA45VC/10	26.0mm
CSTBA45VC/11	29.0mm
CSTBA45VC/12	31.5mm
CSTBA45VC/13	34.0mm
CSTBA45VC/14	36.5mm
CSTBA45VC/15	39.0mm
CSTBA45VC/16	41.5mm
CSTBA45VC/17	44.0mm
CSTBA45VC/18	46.5mm
CSTBA45VC/19	49.0mm
CSTBA45VC/20	51.5mm
CSTBA45VC/21	54.0mm
CSTBA45VC/22	56.5mm
CSTBA45VC/23	59.0mm
CSTBA45VC/24	61.5mm

### SPECIFICATION

Rating	4A/130V UL=4A/150V, VDE=6A/130V
Operating temperature	-40°C to 105°C
Spring	Stainless strip steel
Pin Terminal	Brass/Tin Plated
PCB Hole Diameter	Ø1.3mm

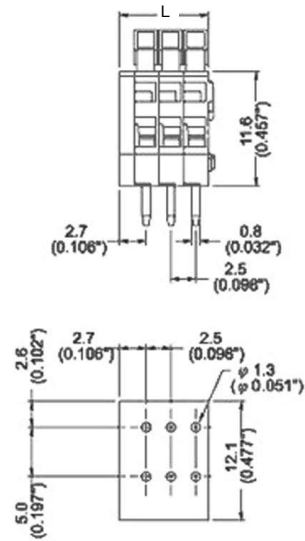

PCB  
TERMINAL  
BLOCKS

INTER-  
CONNECTION

FUSES &  
FUSE-  
HOLDERS

LEDs &  
INDICATORS

MINIATURE  
SWITCHES

LIMIT &  
SAFETY  
SWITCHES

CONTROL  
PRODUCTS

INTERFACE  
MODULES &  
SUPPORTS

RELAY  
BASES

ENCLOSURES

BATTERIES

TRANS-  
FORMERS



+44 (0)1638 716101  
info@camdenboss.com  
www.camdenboss.com

We operate a constant improvement policy,  
our products are subject to change without notice.

**CAMDENBOSS**  
ELECTRONICS & ENCLOSURES