

7.5mm Pitch Standard Profile 90° Screw Terminal

- 2 & 3 pole interlocking
- 4-12 pole pre-assembled
- Moulded in grey UL94-V0 flame retardant Lexan
- Wire protector terminals
- 2.5mm² cable entry
- CE, UL, RoHS, REACH, approved
- Anti solder wicking terminals
- Guided pin alignment




CTB1150

Type No.	Poles	Length
CTB1150/2	2	15mm
CTB1150/3	3	22.5mm
CTB1150/4	4	30mm
CTB1150/5	5	37.5mm
CTB1150/6	6	45mm
CTB1150/7	7	52.5mm
CTB1150/8	8	60mm
CTB1150/9	9	67.5mm
CTB1150/10	10	75mm
CTB1150/11	11	82.5mm
CTB1150/12	12	90mm

Specification

Rating	17.5A/750V, UL=14A, CUL=14A, IMQ=24A, VDE=24A
Dielectric strength	≥3kV
Insulation resistance	≥5MΩ
Working temperature	125°C
Moulding	UL94-V0 flame retardant Lexan
Pin/terminal	Tinned, nickel plated brass
Wire protector	Nickel plated brass
Screw/torque	M3 steel, zinc colour plated/0.5Nm
Recommended PCB hole size	ø1.1mm

CTB1150 series



For other dimensions see CTB1100

7.5 mm Pitch Standard Profile Rising Clamp Terminal


- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 retardant PA
- Professional rising clamp terminals
- 2.5mm² cable entry
- CE, UL, RoHS, REACH, approved
- Guided pin alignment



CTB0110 series

Type No.	Poles	Length
CTB0110/2	2	15mm
CTB0110/3	3	22.5mm
CTB0110/4	4	30mm
CTB0110/5	5	37.5mm
CTB0110/6	6	45mm
CTB0110/7	7	52.5mm
CTB0110/8	8	60mm
CTB0110/9	9	67.5mm
CTB0110/10	10	75mm
CTB0110/11	11	82.5mm
CTB0110/12	12	90mm

CTB0110 series

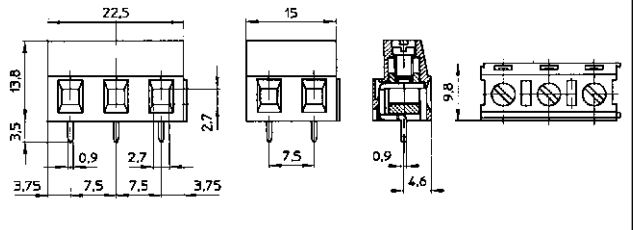

Specification

Rating	24A/500V, UL=14A, CUL=14A, IMQ=24A, VDE=24A
Dielectric strength	≥3kV
Impulse withstand voltage	6kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned, nickel plated brass
Wire clamp	Nickel plated brass
Screw/torque	M3 steel, zinc colour plated/0.5Nm
Recommended PCB hole size	ø1.3mm