

### 7.5mm Pitch High Current 90° Rising Clamp Terminal

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 4mm<sup>2</sup> cable entry
- CE, RoHS, REACH, approved
- Guided pin alignment
- Captive screw




CTB07HK series

Type No.	Poles	Length
CTB07HK/2	2	15mm
CTB07HK/3	3	22.5mm
CTB07HK/4	4	30mm
CTB07HK/5	5	37.5mm
CTB07HK/6	6	45mm
CTB07HK/7	7	52.5mm
CTB07HK/8	8	60mm
CTB07HK/9	9	67.5mm
CTB07HK/10	10	75mm
CTB07HK/11	11	82.5mm
CTB07HK/12	12	90mm

#### Specification

Rating	24A/500V, UL=16A, CUL=16A, IMQ=24A, VDE=24A
Dielectric strength	≥2.5kV
Impulse withstand voltage	4kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned, nickel plated brass
Wire clamp	Nickel plated brass
Screw/torque	M3 steel, zinc colour plated/0.5Nm
Recommended PCB hole size	ø1.3mm




### 7.62mm Pitch Standard Profile Rising Clamp Terminal

- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 2.5mm<sup>2</sup> cable entry
- CE, RoHS, REACH, approved
- Guided pin alignment



CTB0118 series

Type No.	Poles	Length
CTB0118/2	2	15.24mm
CTB0118/3	3	22.86mm
CTB0118/4	4	30.48mm
CTB0118/5	5	38.10mm
CTB0118/6	6	45.72mm
CTB0118/7	7	53.34mm
CTB0118/8	8	60.96mm
CTB0118/9	9	68.58mm
CTB0118/10	10	76.20mm
CTB0118/11	11	83.82mm
CTB0118/12	12	91.44mm

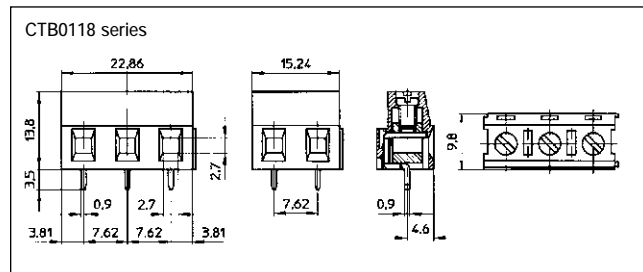

#### Specification

Rating	24A/500V, UL=14A, CUL=14A, IMQ=24A, VDE=24A
Dielectric strength	≥3kV
Impulse withstand voltage	6kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned, nickel plated brass
Wire protect	Nickel plated brass
Screw/torque	M3 steel, zinc colour plated/0.5Nm
Recommended PCB hole size	ø1.3mm