



3.81mm Pitch Ultra Low Profile Rising Clamp Terminal

- interlocking
- Ultra low profile
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 0.75mm² cable entry
-  approved
- Captive screws
- Guided pin alignment
- Double interlock mechanism for increased strength




CTB0308

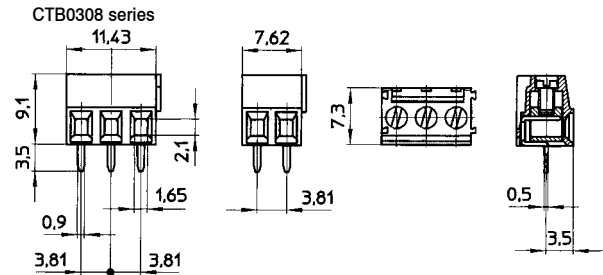

Type No.	Poles	Length
CTB0308/2	2	7.62mm
CTB0308/3	3	11.43mm
CTB0308/4	4	15.24mm
CTB0308/5	5	19.05mm
CTB0308/6	6	22.86mm
CTB0308/7	7	26.67mm
CTB0308/8	8	30.48mm
CTB0308/9	9	34.29mm
CTB0308/10	10	38.10mm
CTB0308/11	11	41.91mm
CTB0308/12	12	45.72mm

Rating	10A/130V, UL=10A, CUL=10A, IMQ=10A, VDE=10A
Dielectric strength	1.25kV
Impulse withstand voltage	2.5kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	tinned, nickel plated brass
Rising clamp	Nickel plated brass
Screw/torque	M2 steel, zinc colour plated 0.3Nm
Recommended PCB hole size	ø1.1mm


3.81mm Pitch Ultra Low Profile 90° Rising Clamp Terminal

- 2-12 pole interlocking
- Ultra low profile
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 0.75mm² cable entry
-  approved
- Captive screws
- Guided pin alignment
- Double interlock mechanism for increased strength



CTB0358

CTB0358 series



For other dimensions see CTB0308

Type No.	Poles	Length
CTB0358/2	2	7.62mm
CTB0358/3	3	11.43mm
CTB0358/4	4	15.24mm
CTB0358/5	5	19.05mm
CTB0358/6	6	22.86mm
CTB0358/7	7	26.67mm
CTB0358/8	8	30.48mm
CTB0358/9	9	34.29mm
CTB0358/10	10	38.10mm
CTB0358/11	11	41.91mm
CTB0358/12	12	45.72mm

Rating	10A/130V, UL=10A, CUL=10A, IMQ=10A, VDE=10A
Dielectric strength	1.25kV
Impulse withstand voltage	2.5kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	tinned, nickel plated brass
Rising clamp	Nickel plated brass
Screw/torque	M2 steel, zinc plated 1.5Nm
Recommended PCB hole size	ø1.1mm