

5mm Pitch Plug-in for Vertical or 90° mounting Screw Terminal




CTB1301

- 2-12 pole interlocking
- Plug in
- Test probe facility
- Dual horizontal or vertical mounting
- Moulded in black UL94-V0 flame retardant glass filled Polyester
- Wire protector terminals
- 1.5mm² cable entry
- CE, RoHS, approved
- Captive screws

| Female Connector | | |
|------------------|-------|--------|
| Type No. | Poles | Length |
| CTB1301/2A | 2 | 10mm |
| CTB1301/3A | 3 | 15mm |
| CTB1301/4A | 4 | 20mm |
| CTB1301/5A | 5 | 25mm |
| CTB1301/6A | 6 | 30mm |
| CTB1301/7A | 7 | 35mm |
| CTB1301/8A | 8 | 40mm |
| CTB1301/9A | 9 | 45mm |
| CTB1301/10A | 10 | 50mm |
| CTB1301/11A | 11 | 55mm |
| CTB1301/12A | 12 | 60mm |

CTB1301 series

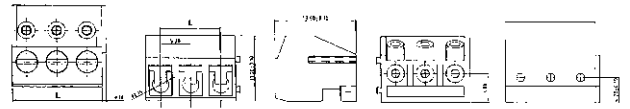


Specification

| | |
|---------------------|--|
| Rating | 10A/300V |
| Dielectric strength | ≥2.5kV |
| Working temperature | 105°C |
| Moulding | UL94V-0 flame retardant glass filled Polyester |
| Terminal | Tinned, copper flashed brass |
| Wire protector | Beryllium copper |
| Screw/torque | M2.6 steel, zinc plated/0.4Nm |


24pin 5mm Pitch Pin Strip Header

- Supplied in 24 way
- Easily cut to required length
- Flame retardant Polyester material
- Anti solder wicking
- Guided pin alignment
- Can be supplied pre-cut
- Single pin available (CTB1301P)

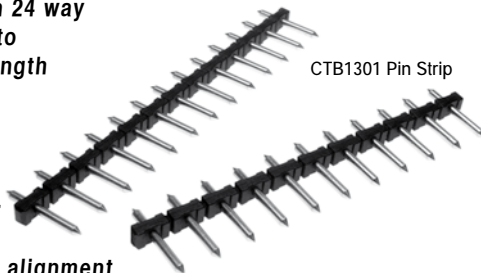

CTB1301 Pin Strip

CTB1301 series

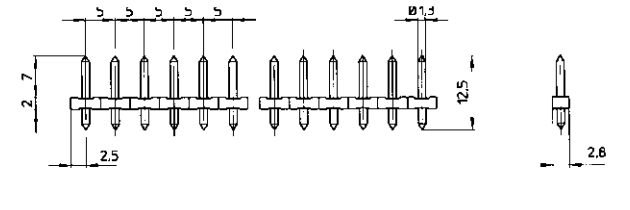

Specification

| | |
|---------------------------|--|
| Rating | 10A/380V |
| Working temperature | -33°C to + 120°C |
| Short period | 160°C |
| Moulding | UL94V-0 flame retardant glass filled Polyester |
| Pins | 5µ tinned, nickel plated brass |
| Recommended PCB hole size | ø1.5mm |

| Type No. | Pin | Poles |
|--------------|------------------|-------|
| CTB1301P | Pin | 1 |
| CTB1301/PS24 | 24 way Pin strip | 24 |