


10mm Pitch Standard Profile 90° Screw Terminal

- 1-6 pole solid block end stackable
- 1 pole in 10mm & 15mm length
- Moulded in grey UL94-V0 flame retardant Lexan
- Wire protector terminals
- 2.5mm² cable entry
-  approved
- Guided pin alignment
- Captive screw
- Anti solder wicking terminals



Type No.	Poles	Length
CTB2050/1/15	1	15mm
CTB2050/1	1	10mm
CTB2050/2	2	15mm
CTB2050/3	3	25mm
CTB2050/4	4	35mm
CTB2050/5	5	45mm
CTB2050/6	6	55mm


CTB2050 Series

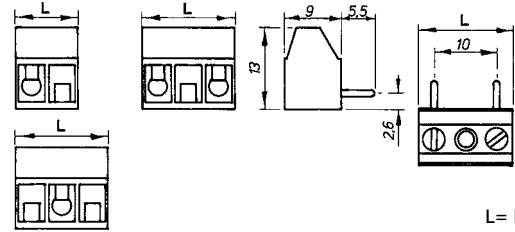

L= Length

Rating	24A/500V, UL=16A, CUL=16A, IMQ=24A, VDE=24A
Dielectric strength	≥2.5kV
Impulse withstand voltage	6kV
Working temperature	85°C
Moulding	UL94-V0 flame retardant Lexan
Pin/terminal	Tinned, nickel plated brass
Wire protector	Tin plated phosphor bronze
Screw/torque	M3 steel, zinc colour plated/0.5Nm
Recommended PCB hole size	ø1.1mm


10mm Pitch Low Profile Screw Terminal

- 1 & 2 pole interlocking
- 1 Pole in 10mm & 15mm length
- 3-12 solid block end stackable
- Test probe facility
- Moulded in grey UL94-V0 flame retardant Lexan
- Wire protector terminals
- 1.5mm² cable entry
-  approved
- Guided pin alignment
- Captive screw
- Anti solder wicking terminals



Type No.	Poles	Length
CTB6000/1	1	10mm
CTB6000/1/15	1	15mm
CTB6000/2	2	15mm
CTB6000/3	3	25mm
CTB6000/4	4	35mm
CTB6000/5	5	45mm
CTB6000/6	6	55mm
CTB6000/7	7	65mm
CTB6000/8	8	75mm
CTB6000/9	9	85mm
CTB6000/10	10	95mm
CTB6000/11	11	105mm
CTB6000/12	12	115mm

CTB6000 Series

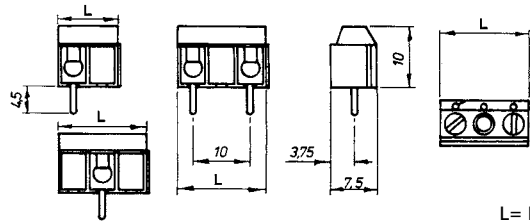

L= Length

Rating	13.5A/500V, UL=14A, CUL=14A, IMQ=13.5A, VDE=13.5A
Dielectric strength	≥3kV
Impulse withstand voltage	6kV
Working temperature	85°C
Moulding	UL94-V0 flame retardant Lexan
Pin/terminal	Tinned nickel plated brass
Wire protector	Tin plated phosphor bronze
Screw/torque	M2.5 steel, zinc colour plated/0.4Nm
Recommended PCB hole size	ø1.1mm