


10mm Pitch Plug-in for Vertical or 90° mounting Screw terminal

- 2-12 pole interlocking
- Plug in
- Test probe facility
- Dual horizontal or vertical mounting
- Moulded in black UL94-V0 flame retardant glass filled Polyester
- Wire protector terminals
- 1.5mm² cable entry
- CE approved
- Captive screws


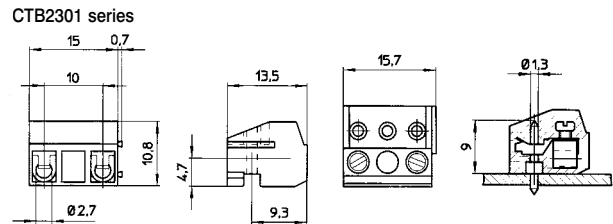


Female Connector Type No.	Poles	Length
CTB2301/1A	1	10mm
CTB2301/1A/15	1	15mm
CTB2301/2A	2	15mm
CTB2301/3A	3	25mm
CTB2301/4A	4	35mm
CTB2301/5A	5	45mm
CTB2301/6A	6	55mm
CTB2301/7A	7	65mm
CTB2301/8A	8	75mm
CTB2301/9A	9	85mm
CTB2301/10A	10	95mm
CTB2301/11A	11	105mm
CTB2301/12A	12	115mm

Rating	10A/630V
Dielectric strength	≥ 2kV
Impulse withstand voltage	4kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant Lexan
Pin/terminal	Tinned, nickel plated brass
Rising clamp	Zinc plated steel
Screw/torque	M2.5 steel, zinc colour plated/0.4Nm
Recommended PCB hole size	Ø1.3mm

12 Pin 10mm Pitch Pin Strip Header

- Supplied as 12 way
- Easily cut to required length
- Flame retardant Polyester material
- Anti-solder wicking
- Guided pin alignment
- Can be supplied pre-cut
- Single pin available (CTB1301P)

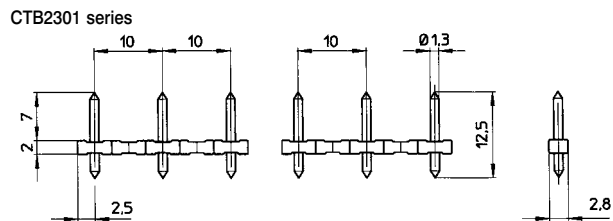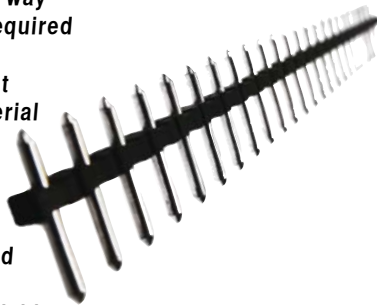

Type No.	Poles
CTB1301P	1
CTB2301/PS12	12

Rating	10A/750V
Moulding	UL94-V0 flame retardant Lexan
Pin/terminal	Tinned, nickel plated brass
Recommended PCB hole size	Ø1.5mm