


3.5mm Pitch Ultra Low Profile Screw Terminal

- Ultra low profile
- Stainless steel wire protector
- 2-12 pole interlocking
- Flame retardant material
- Double interlock mechanism for increased strength
- CE approved
- 1mm² cable entry
- Anti solder wicking terminals
- Captive screws
- Guided pin alignment
- Standard colour black
Other colours available

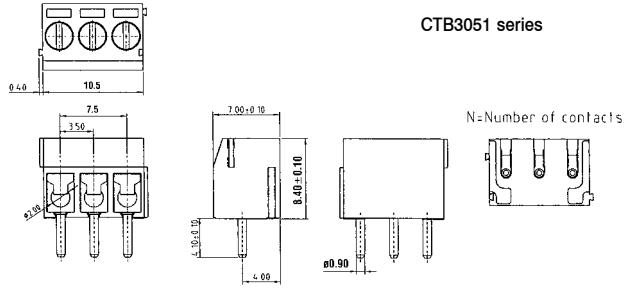

Type No.	Poles	Length
CTB3051/2	2	7mm
CTB3051/3	3	10.5mm
CTB3051/4	4	14mm
CTB3051/5	5	17.5mm
CTB3051/6	6	21mm
CTB3051/7	7	24.5mm
CTB3051/8	8	28mm
CTB3051/9	9	31.5mm
CTB3051/10	10	35mm
CTB3051/11	11	38.5mm
CTB3051/12	12	42mm

Rating	6A/300V
Dielectric strength	1.5kV
Working temperature	105°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned, nickel plated copper flash brass
Screw/torque	M2 steel, zinc plated /0.4Nm max
Recommended PCB hole size:	ø1.1mm