



## 10mm Pitch 18 Pole 90° Rising Clamp Terminal

- Unique 18 pole strip
- Easily cut to required number of poles
- Can be supplied pre-cut
- 1 Pole in 10mm & 15mm length
- Moulded in grey UL94-V0 flame retardant Lexan
- Professional rising clamp terminals
- 4mm<sup>2</sup> cable entry
- CE, UL, RoHS, approved
- Guided pin alignment
- Captive screws
- Anti solder wicking terminals



CTB8050 Series

| Type No.     | Poles | Length |
|--------------|-------|--------|
| CTB8050/1    | 1     | 10mm   |
| CTB8050/1/15 | 1     | 15mm   |
| CTB8050/2    | 2     | 15mm   |
| CTB8050/3    | 3     | 25mm   |
| CTB8050/4    | 4     | 35mm   |
| CTB8050/5    | 5     | 45mm   |
| CTB8050/6    | 6     | 55mm   |
| CTB8050/7    | 7     | 65mm   |
| CTB8050/8    | 8     | 75mm   |
| CTB8050/9    | 9     | 85mm   |
| CTB8050/10   | 10    | 95mm   |
| CTB8050/11   | 11    | 105mm  |
| CTB8050/12   | 12    | 115mm  |
| CTB8050/18   | 18    | 175mm  |

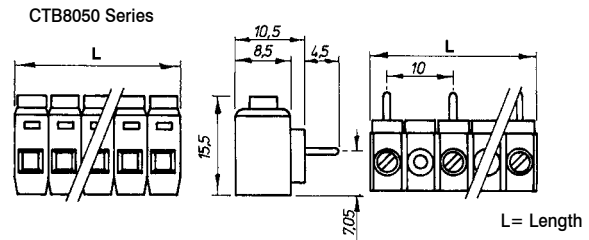

Rating 22A/500V, UL=16A, CUL=16A, IMQ=22A, Vde=22A

Dielectric strength ≥3kV

Impulse withstand voltage 6kV

Working temperature 85°C

Moulding UL94-V0 flame retardant Lexan

Pin/terminal 5μ tinned, nickel plated brass


Rising clamp Zinc plated steel

Screw/torque M2.5 steel, zinc plated /0.4Nm

Recommended PCB hole size ø1.3mm


## 10mm Pitch 45° Rising Clamp Terminal

- 1-12 pole interlocking
- 1 Pole in 10mm & 15mm length
- 45° mounting
- Captive screws
- Moulded in grey UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 4mm<sup>2</sup> cable entry
- CE, UL, RoHS, approved



CTB4000

| Type No.     | Poles | Length |
|--------------|-------|--------|
| CTB4000/1    | 1     | 10mm   |
| CTB4000/1/15 | 1     | 15mm   |
| CTB4000/2    | 2     | 15mm   |
| CTB4000/3    | 3     | 25mm   |
| CTB4000/4    | 4     | 35mm   |
| CTB4000/5    | 5     | 45mm   |
| CTB4000/6    | 6     | 55mm   |
| CTB4000/7    | 7     | 65mm   |
| CTB4000/8    | 8     | 75mm   |
| CTB4000/9    | 9     | 85mm   |
| CTB4000/10   | 10    | 95mm   |
| CTB4000/11   | 11    | 105mm  |
| CTB4000/12   | 12    | 115mm  |

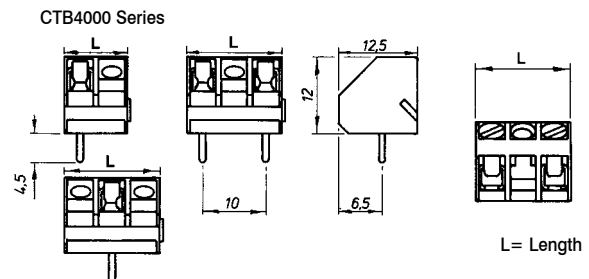

Rating 24A/500V, UL=16A, CUL=16A, IMQ=24A, Vde=24A

Dielectric strength ≥3kV

Impulse withstand voltage 6kV

Working temperature 110°C

Moulding UL94-V0 flame retardant PA

Pin/terminal Tinned, nickel plated brass

Rising clamp Zinc plated steel

Screw/torque M2.5 steel, zinc colour plated/0.4Nm

Recommended PCB hole size ø1.3mm