
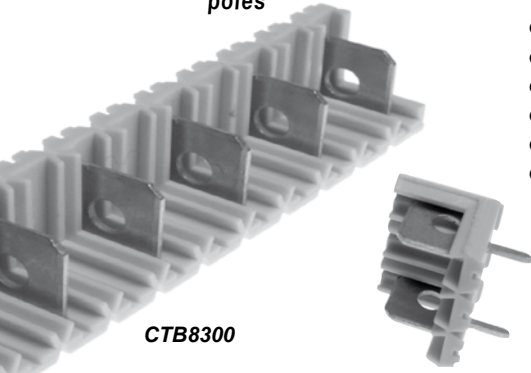



10mm Pitch Plug-in Rising Clamp Terminal

- Unique 18 pole strip
- Easily cut to required number of poles
- Can be supplied pre-cut to specified number of poles
- Dual horizontal or vertical mounting
- Moulded in grey UL94-V0 flame retardant Lexan
- Professional rising clamp terminals
- 4mm² cable entry
-  approved
- Optional polarising clips
- Anti solder wicking
- Guided pin alignment
- Captive screws




CTB8300

CTB8300 series

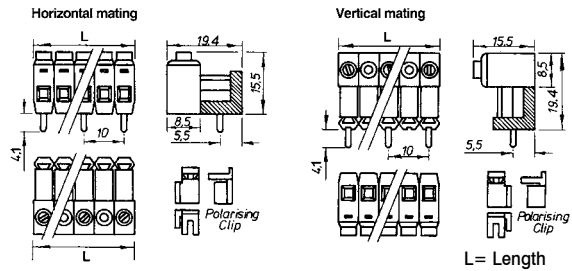

Rating	18A/500V, UL=14A, CUL=14A, IMQ=18A
Dielectric strength	≥2.5kV
Impulse withstand voltage	4kV
Working temperature	85°C
Moulding	UL94-V0 flame retardant Lexan
Pin/terminal	Tinned, nickel plated brass
Rising clamp	Zinc plated steel
Screw/torque	M2.5 steel, zinc colour plated/0.4Nm
Recommended PCB hole size	ø1.3mm

Type No.	Poles	Length	Type No.	Poles	Length
Female Connector			PCB Mounting Male		
CTB8300/2F	2	15mm	CTB8300/2M	2	15mm
CTB8300/3F	3	25mm	CTB8300/3M	3	25mm
CTB8300/4F	4	35mm	CTB8300/4M	4	35mm
CTB8300/5F	5	45mm	CTB8300/5M	5	45mm
CTB8300/6F	6	55mm	CTB8300/6M	6	55mm
CTB8300/7F	7	65mm	CTB8300/7M	7	65mm
CTB8300/8F	8	75mm	CTB8300/8M	8	75mm
CTB8300/9F	9	85mm	CTB8300/9M	9	85mm
CTB8300/10F	10	95mm	CTB8300/10M	10	95mm
CTB8300/11F	11	105mm	CTB8300/11M	11	105mm
CTB8300/12F	12	115mm	CTB8300/12M	12	115mm
CTB8300/18F	18	175mm	CTB8300/18M	18	175mm
			Polarising Clips		

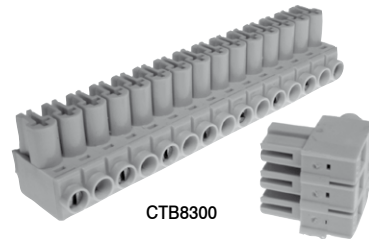


CTB8300

Polarising Clip

Type No.	
CTB7300/C	1 pair

Polarising Clips



Fitted to each end of the male connector ensures correct vertical or horizontal orientation of the female part