


I.D.C


Features

- Low profile
- Cable acceptance of up to 4mm²
- 45° cable entry for easy access
- Ensures simple and speedy interfacing between data and field cables

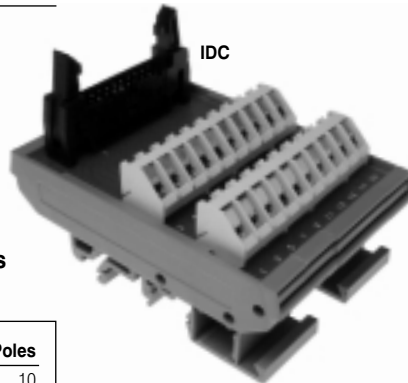

Type No.	Poles
CIM/10W-IDCS	10
CIM/20W-IDCS	20
CIM/26W-IDCS	26
CIM/34W-IDCS	34
CIM/40W-IDCS	40
CIM/50W-IDCS	50

IDC Series




Specification

Voltage	50V DC max
Current	1A max
Connections	Screw terminal 45° Rising clamp 4mm ² wire acceptance
Width	82mm all types
Length	10 pole 55mm 20 pole 55mm 26 pole 80mm 34 pole 90mm 40 pole 113mm 50 pole 134mm

Subminiature 'D' connectors

Features


- Low profile
- Cable acceptance of up to 4mm²
- 45° cable entry for easy access
- Ensures simple and speedy interfacing between data and field cables

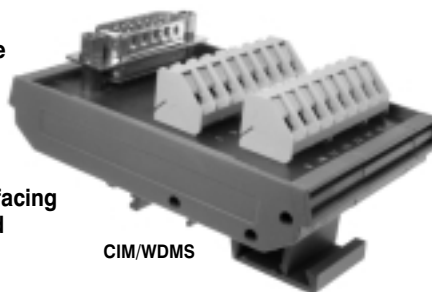

Type No.	Ways
CIM/9WDMS	9
CIM/15WDMS	15
CIM/25WDMS	25
CIM/37WDMS	37
CIM/9WDFS	9
CIM/15WDFS	15
CIM/25WDFS	25
CIM/37WDFS	37

NB DMS = Male 'D'
DFS = Female 'D'

CIM/WDF series

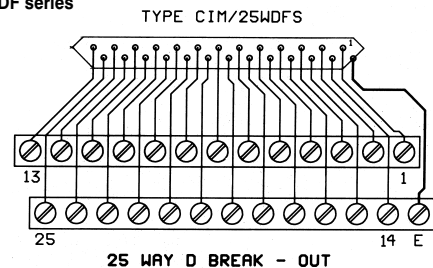

Specification

Voltage	50V DC max
Current	1A max
Connections	Screw terminal 45° Rising clamp 4mm ² wire acceptance Option sub-miniature D male or female
Width	82mm all types
Length	9 way 34mm 15 way 57mm 25 way 80mm 37 way 113mm
Earth	The metal surround of the D is utilised and taken to a connector terminal