

INTER-CONNECTION

3-way terminal strips with cable clamp

Features

- Moulded from PA6
- Self-extinguishing
- Releasable cable clamp, up to 12.7mm dia
- Screw or snap in mounting
- VDE approved
- CE 72/73 and 93/68
- Compliant with EN60598 4.7 and 11.2
- All tests from EN60998-1, -2-1, and -2.2


CSR1-TB	2.5mm wire dia
CSR2-TB	4.0mm wire dia
CSR3-TB	6.0mm wire dia

Specifications


Voltage (max)	450VAC
Working Temperature	-5 to +85°C
Moulding	UL94-V2 self-extinguishing
Standard insert	Nickel-plated brass
Screws	Zinc-plated steel CQ-15, metric thread
Wire protectors	Stainless steel





CSR1TB



CSR2TB

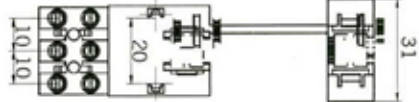

CSR3TB

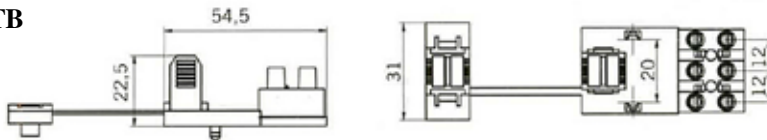

Snap in mounting

Max. thickness of metal plate: 1 mm